

## TSB

### Torque Speed Box

#### FEATURES


- Two torquemeters' input
- Analog output:  $\pm 5$  V (torque)  
To use with a differential amplifier
- TTL output (speed)
- Power supply : 100 / 240V~ 50/60 Hz

#### DESCRIPTION

The TSB allows data acquisition resulting from two torquemeters and provide torque's analogical signal output and speed's TTL signal output.



#### SYSTEM CONFIGURATION

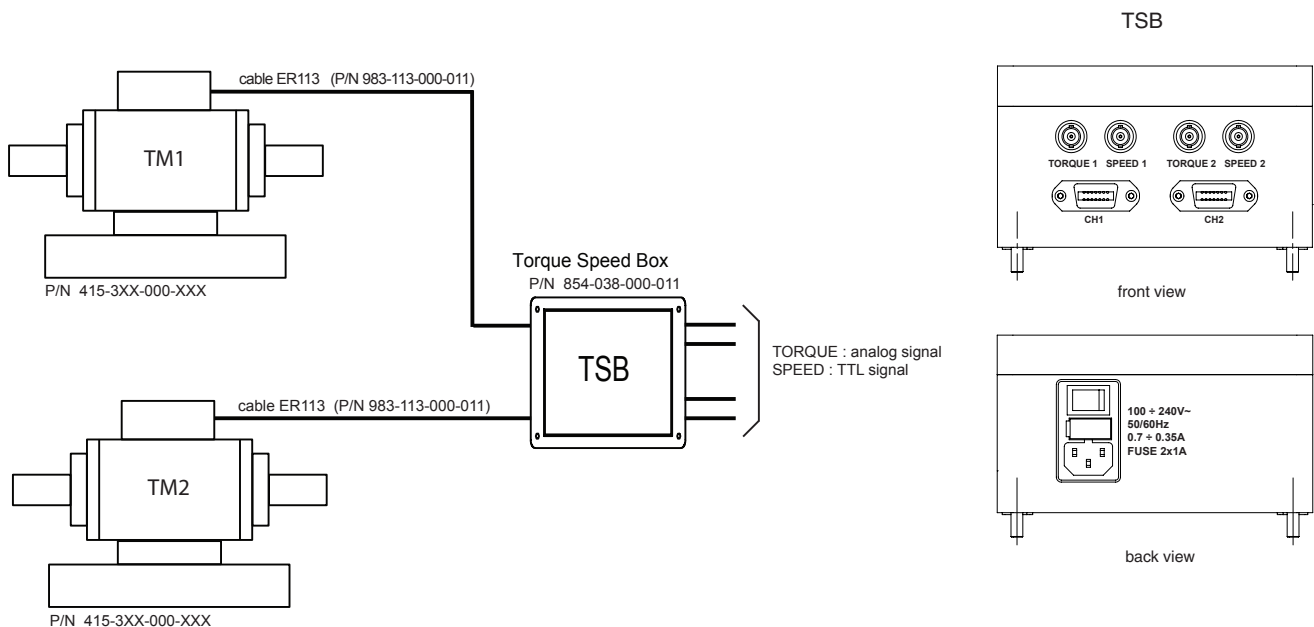

*Due to the continual development of our products, we reserve the right to modify specifications without forewarning.*



**MAGTROL SA**  
Route de Montena 77  
1728 Rossens/Fribourg, Suisse  
Tél: +41 (0)26 407 3000  
Fax: +41 (0)26 407 3001  
E-mail: magtrol@magtrol.ch

**MAGTROL INC**  
70 Gardenville Parkway  
Buffalo, New York 14224 USA  
Tél: +1 716 668 5555  
Fax: +1 716 668 8705  
E-mail: magtrol@magtrol.com

[www.magtrol.com](http://www.magtrol.com)

**Subsidiaries in:**  
Germany • France  
China • India  
Worldwide Network  
of Sales Agents

